


HL64H


krovni slivnik DN 75/110 horizontalni, s bitumenskom prirubnicom



Krovni slivnik DN75/110 horizontalni sa toplinski izoliranom stijenkom, tvornički navarenom bitumenskom prirubnicom d 500 mm za idealno spajanje sa bitumenskom krovnom hidroizolacijom i hvatačem lišća d 180mm. Građevinska zaštita sadržana u isporuci.

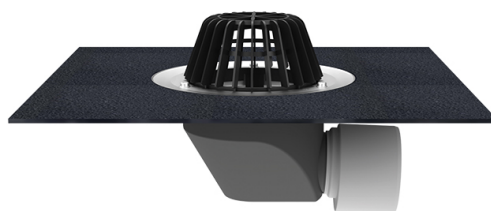

Tehnički crtež

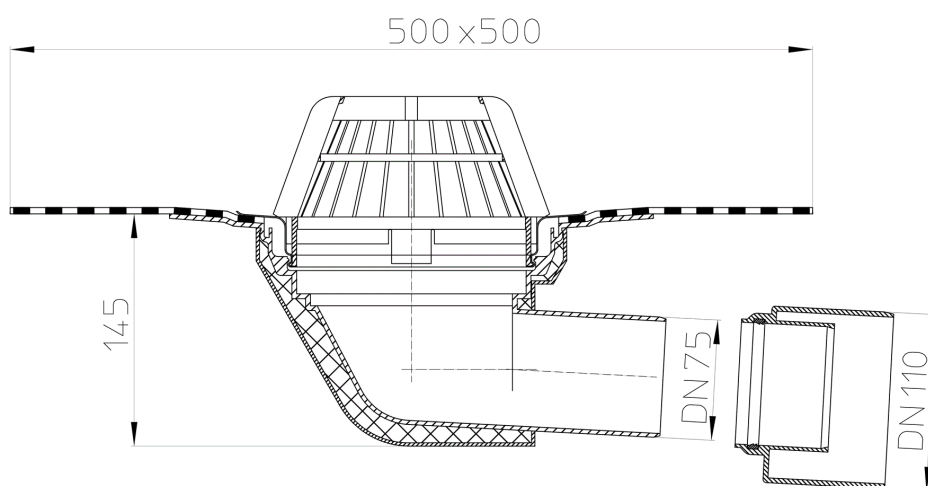

GLAVNI PODACI

rezervni (nadoknadni) dijelovi

**HL0317.4E**

Redukcija DN110xDN75

**HL062.1E**

Hvatač lišća

**HL170**

Plitki hvatač lišća d 150mm

pribor**HL160**

Prsten za odvodnjavanje d 150mm

**HL175**

Hvatač lišća od INOXA

**HL635N**

Revizijsko i drenažno okno za terase, zelene i šljunčane krovove. Uključujući plastični okvir i poklopac.

**HL0635N.2**

Rešetka od pocinčanog čelika za revizijsko i drenažno okno HL635N(.0)

**HL0635N.3**

Plastični poklopac za revizijsko i drenažno okno HL635N(.0)

**HL636N**

Produljenje za revizijsko i drenažno okno HL635N(.0)

**HL66**

Nastavni element d 145mm/okvir od INOXA 150x150mm /138x138mm pričvršćen vijcima

**HL01058D**

Protupovratna brtva za priрубnicu od INOXA 220x155mm

**HL062B.3E**

Noseći prsten

**HL350**

Nastavni element 130mm/d 145mm

**HL350.1**

Nastavni element 180mm/d 145mm s brtvenom priрубnicom i izolacionom garniturom HL84

**HL350.1H**

Nastavni element 180mm/d 145mm s bitumenskom priрубnicom

**HL350.2**

Nastavni element 130mm/d 145mm sa doljevom DN40

**HL65**

Nastavni element 300 mm za krovni slivnik, DN125 sa brtvenom priрубnicom i INOX stezaljkom za spajanje sa hidroizolacionim folijama

**HL65H**

Nastavni element 300 mm za krovni slivnik, DN125 sa bitumenskom priрубnicom

**HL65P**

Nastavni element 345mm/d 125mm sa PVC-priрубnicom

**HL66.1**

Nastavni element d 145mm/okvir od INOXA 150x150mm (V4A)/138x138mm (V4A) pričvršćen vijcima i protuklizni

**HL66.9**

Nastavni element d 145mm sa žlijebovima/148x148mm/138x138mm

**HL67**

Uljevni element okrugli d 145 mm/okvir od nehrđajućeg čelika d 155 mm (V4A)/ d 145mm

izmjenjivi dijelovi**HL64.1H**

Krovni slivnik DN 75/110 horizontalni, bitumenska manžeta i grijač (10-30W/230V)

**HL64BH**

Krovni slivnik DN 75/110 horizontalni, s bitumenskom prirubnicom, prohodni 148x148mm/137x137mm