

HL90.2


Slivnik za balkon i terasu DN 40/50, horizontalni sa zatvaračem zadaha (klapna),
123x123mm, 115x115mm



Slivnik za balkone i terase od PP, DN40/50 horizontalni, ugradbene visine 57 mm, sa protokom 0,50 l/s, priрубnicom za prihvat odgovarajućeg pribora za spoj sa hidroizolacijom, suhim zatvaračem zadaha otpornim na smrzavanje, nastavim okvirom podesivim po visini 12 - 70 mm / 123 x 123 mm sa mogućnošću odvodnje procjedne vode sa hidroizolacije, uljevnom INOX rešetkom 115 x 115 mm nosivosti 300 kg.



Tehnički crtež

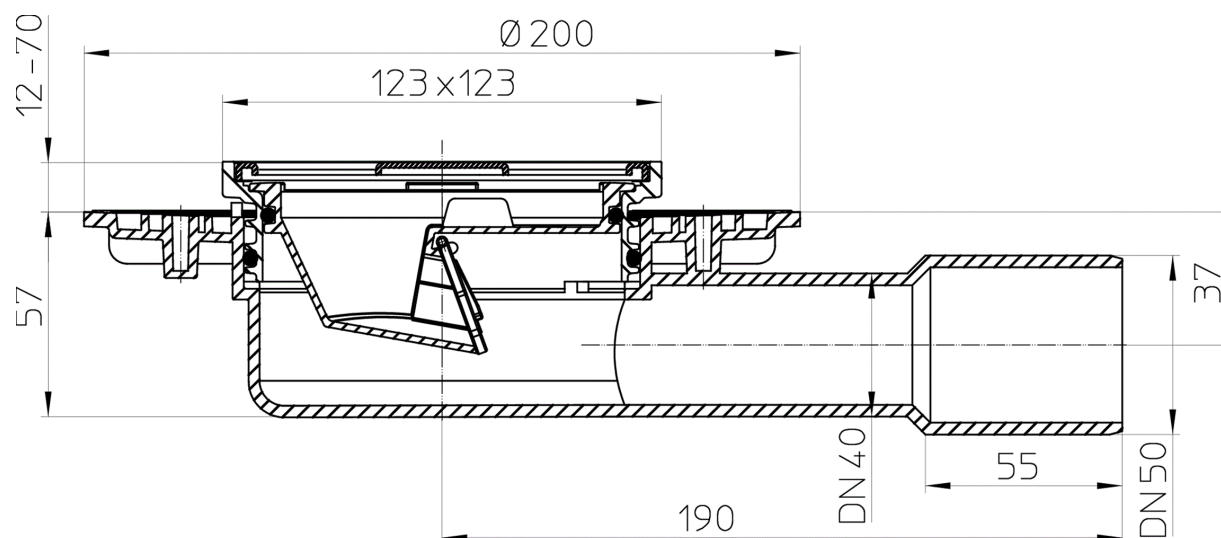

GLAVNI PODACI

rezervni (nadoknadni) dijelovi



HL090.4E

Protuzadahní umetak (klapna)



HL37N

Završni element d 110mm/123x123mm/115x115mm. Građevinska zaštita sadržana u isporuci.

**HL037N.2E**

Nastavni element d110mm/90mm/123x123mm uklj.okrugla brtva, visina okvira 10mm

**HL037Pr.1E**

Uljevna rešetka Primus od INOXA 115x115mm

**HL90K**

Kućište slivnika za balkon i terasu DN40/50 horizontalno

pribor**HL180**

Prsten za odvodnjavanje d 110mm

**HL181**

Plitki hvatač lišća za balkonske i terasne slivnike serije HL80, HL90 i HL310K, HL510K

**HL619**

Pričvrсни set "FixT"

**HL340N**

Produžni element 80mm/d 110mm uklj. O-Brtva

**HL85N**

Nastavni element sa prirubnicom i brtvom O-ring

**HL85NC**

Nastavni element sa polimerbetonskom prirubnicom

**HL85NH**

Nastavni element sa bitumenskom prirubnicom i protupovratnom O-Ring-brtvom