

## HL62FSafe/2


Sigurnosni krovni slivnik DN125 sa PP-prirubnicom i po visini podešavajućim uljevom



Sigurnosni krovni slivnik vertikalni DN125 sa PP-prirubnicom i po visini podešavajućim uljevom 28-68mm.



### Tehnički crtež

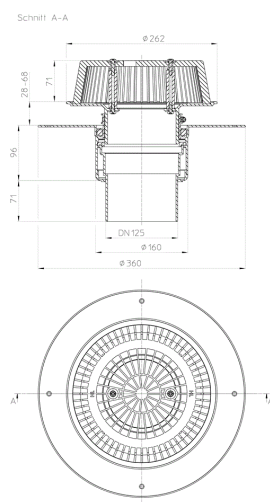

### TEHNIČKI PODACI

|                           |              |                          |                       |
|---------------------------|--------------|--------------------------|-----------------------|
| <b>materijal</b>          | PP           | <b>visina ugradnje</b>   | 100 mm                |
| <b>dimenzija (mjera)</b>  | DN125        | <b>nastavak (umetak)</b> |                       |
| <b>učinak / kapacitet</b> | see Download | <b>rešetka dotoka</b>    | Laubfangkorb d 262 mm |
| <b>težina</b>             | 3,514        | <b>klasa opterećenja</b> |                       |

## GLAVNI PODACI

## rezervni (nadoknadni) dijelovi

**HL062.1Safe**

Hvatač lišća za sigurnosne slivnike

**HL170**

Plitki hvatač lišća d 150mm

## pribor

**HL65**

Nastavni element 300 mm za krovni slivnik, DN125 sa brtvenom prirubnicom i INOX stezaljkom za spajanje sa hidroizolacionim folijama

**HL062.1E**

Hvatač lišća

**HL062B.3E**

Noseći prsten

**HL175**

Hvatač lišća od INOXA

**HL66**

Nastavni element d 145mm/okvir od INOXA 150x150mm /138x138mm pričvršćen vijcima

**HL66.1**

Nastavni element d 145mm/okvir od INOXA 150x150mm (V4A)/138x138mm (V4A) pričvršćen vijcima i protuklizni

**HL66.9**

Nastavni element d 145mm sa žljebovima/148x148mm/138x138mm

**HL67**

Uljevni element okrugli d 145 mm/okvir od nehrđajućeg čelika d 155 mm (V4A)/ d 145mm

**HL350**

Nastavni element 130mm/d 145mm

**HL350.1**

Nastavni element 180mm/d 145mm s brtvenom prirubnicom i izolacionom garniturom HL84

**HL350.1H**

Nastavni element 180mm/d 145mm s bitumenskom prirubnicom

**HL65F**

Nastavni element 345mm / d 125mm sa PP prirubnicom

**HL160**

Prsten za odvodnjavanje d 150mm

**HL635N**

Revizijsko i drenažno okno za terase, zelene i šljunčane krovove. Uključujući plastični okvir i poklopac.

**HL65H**

Nastavni element 300 mm za krovni slivnik, DN125 sa bitumenskom prirubnicom

**HL65P**

Nastavni element 345mm/d 125mm sa PVC-prirubnicom

**izmjenjivi dijelovi****HL62Safe/2**

Sigurnosni krovni slivnik DN125 sa po visini podešavajućim uljevom

**PODACI O PAKIRANJU****DOWNLOADS**

|                        |                              |                            |
|------------------------|------------------------------|----------------------------|
| <b>TLAK</b>            | <b>HL62FSafe_pr</b>          | max.                       |
| <b>Oglas (WEB)</b>     | <b>HL62FSafe_B</b>           | 640x480/300dpi             |
| <b>Foto Parts List</b> | <b>HL62FSafe_gr</b>          | 150x150/72dpi              |
| <b>Tehnički crtež</b>  | <b>HL62FSafe-2_1_a</b>       | pdf                        |
| <b>Tehnički crtež</b>  | <b>HL62FSafe-2_1_a</b>       | png                        |
| <b>CAD</b>             | <b>HL62FSafe-2_2_a1</b>      | dxf                        |
| <b>other</b>           | <b>H62FSafe_Capacity.pdf</b> | Capacity / Abflussleistung |