


HL64.1Safe

Sigurnosni krovni slivnik DN75/110 horizontalni sa grijačem i po visini podešavajućim uljevom



Sigurnosni krovni slivnik horizontalni DN75/110 sa stezaljkama, grijačem i po visini podešavajućim uljevom 28-68mm.

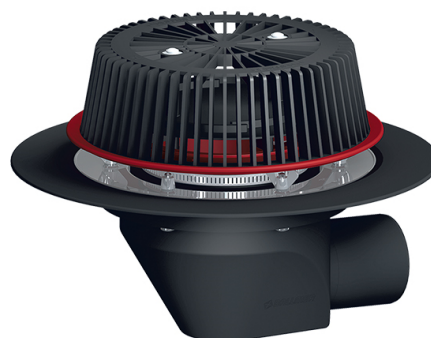

TEHNIČKI PODACI

materijal	PP	visina ugradnje	150 mm
dimenzija (mjera)	DN75/DN110	nastavak (umetak)	
učinak / kapacitet	see Download	rešetka dotoka	Laubfangkorb d 262 mm
težina	3,054	klasa opterećenja	
EAN	9003076040902	dotok	
		norme	

GLAVNI PODACI

rezervni (nadoknadni) dijelovi



HL062.1Safe

Hvatač lišća za sigurnosne slivnike



HL062.3E

Prirubnica od INOXA



HL062.4E

Krilne matice (6 kom.)

HL062N.4E

6 Heksagon

**HL170**

Plitki hvatač lišća d 150mm

pribor**HL65**

Nastavni element 300 mm za krovni slivnik, DN125 sa brtvenom prirubnicom i INOX stezaljkom za spajanje sa hidroizolacionim folijama

**HL062.1E**

Hvatač lišća

**HL062B.3E**

Noseći prsten

**HL175**

Hvatač lišća od INOXA

**HL66**

Nastavni element d 145mm/okvir od INOXA 150x150mm /138x138mm pričvršćen vijcima

**HL66.1**

Nastavni element d 145mm/okvir od INOXA 150x150mm (V4A)/138x138mm (V4A) pričvršćen vijcima i protuklizni

**HL66.9**

Nastavni element d 145mm sa žljebovima/148x148mm/138x138mm

**HL67**

Uljevni element okrugli d 145 mm/okvir od nehrđajućeg čelika d 155 mm (V4A)/ d 145mm

**HL350**

Nastavni element 130mm/d 145mm

**HL350.1**

Nastavni element 180mm/d 145mm s brtvenom prirubnicom i izolacionom garniturom HL84

**HL350.1H**

Nastavni element 180mm/d 145mm s bitumenskom prirubnicom

**HL65H**

Nastavni element 300 mm za krovni slivnik, DN125 sa bitumenskom prirubnicom

**HL65P**

Nastavni element 345mm/d 125mm sa PVC-prirubnicom

PODACI O PAKIRANJU**DOWNLOADS**

TLAK	HL64Safe_pr	max.
Oglas (WEB)	HL64Safe_B	640x480/300dpi
Foto Parts List	HL64Safe_gr	150x150/72dpi
other	HL64Safe_Capacity.pdf	Capacity / Abflussleistung