


HL64BF/7


Krovni slivnik DN75 horizontalni sa PP prirubnicom. Prohodan - 148x148mm / 137x137mm



Krovni slivnik za ravne krovove DN75 horizontalni sa toplinski izoliranom stijenkom, PP prirubnicom za lijepljenje (varenje) sa FPO-folijama na bazi PP-a, po visini podesivim završnim okvirom 20 - 75 mm / 148 x 148 mm i uljevnom rešetkom od INOXA 137 x 137 mm. Građevinska zaštita sadržana u isporuci.

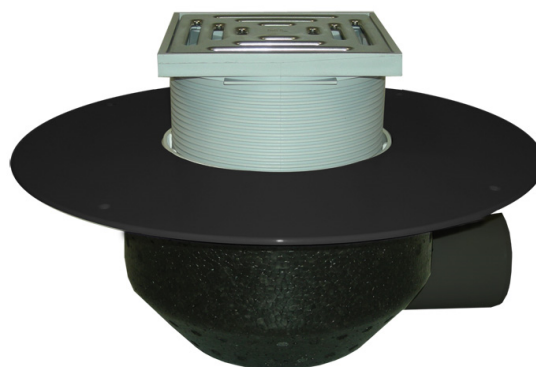

Tehnički crtež

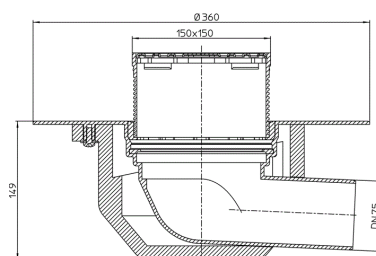

TEHNIČKI PODACI

materijal	PP	visina ugradnje	
dimenzija (mjera)	DN75	nastavak (umetak)	
učinak / kapacitet	3,70 l/sec	rešetka dotoka	Edelstahl 137 x 137 mm
težina	1,04	klasa opterećenja	K3 - 300 kg

GLAVNI PODACI

rezervni (nadoknadni) dijelovi

**HL062B.3E**

Noseći prsten

**HL170**

Plitki hvatač lišća d 150mm

**HL66.9**

Nastavni element d 145mm sa žljebovima/148x148mm/138x138mm

**HL0317.1E**

Uljevna rešetka od INOXA 139x139mm

**HL062B.2E**

Nastavni element d 145mm/90mm/148x148mm

HL066.4E

Okrugla brtva 135x2,5mm

pribor

**HL160**

Prsten za odvodnjavanje d 150mm

**HL635N**

Revizijsko i drenažno okno za terase, zelene i šljunčane krovove. Uključujući plastični okvir i poklopac.

**HL0635N.2**

Rešetka od pocinčanog čelika za revizijsko i drenažno okno HL635N(.0)

**HL0635N.3**

Plastični poklopac za revizijsko i drenažno okno HL635N(.0)

**HL636N**

Produljenje za revizijsko i drenažno okno HL635N(.0)

**HL66**

Nastavni element d 145mm/okvir od INOXA 150x150mm /138x138mm pričvršćen vijcima

**HL01058D**

Protupovratna brtva za priрубnicu od INOXA 220x155mm

**HL350**

Nastavni element 130mm/d 145mm

**HL350.1**

Nastavni element 180mm/d 145mm s brtvenom priрубnicom i izolacionom garniturom HL84

**HL350.1H**

Nastavni element 180mm/d 145mm s bitumenskom priрубnicom

**HL350.2**

Nastavni element 130mm/d 145mm sa doljevom DN40

**HL65**

Nastavni element 300 mm za krovni slivnik, DN125 sa brtvenom prirubnicom i INOX stezaljkom za spajanje sa hidroizolacionim folijama

**HL65H**

Nastavni element 300 mm za krovni slivnik, DN125 sa bitumenskom prirubnicom

**HL65P**

Nastavni element 345mm/d 125mm sa PVC-prirubnicom

**HL66.1**

Nastavni element d 145mm/okvir od INOXA 150x150mm (V4A)/138x138mm (V4A) pričvršćen vijcima i protuklizni

**HL67**

Uljevni element okrugli d 145 mm/okvir od nehrđajućeg čelika d 155 mm (V4A)/ d 145mm

izmjenjivi dijelovi**HL64.1**

Krovni slivnik DN 75/110 horizontalni, brtvena prirubnica, element sa stezaljkama i grijačem (10-30W/230V)

**HL64.1B**

krovni slivnik DN 75/110 horizontalni, brtvena prirubnica, element sa stezaljkama i grijačem (10-30W/230V), prohodni 148x148 mm/137x137mm

**HL64.1BF/7**

Krovni slivnik DN75 horizontalni sa PP prirubnicom i grijačem (10-30W/230V). Prohodan - 148x148mm / 137x137mm

**HL64.1F/7**

Krovni slivnik DN75 horizontalni sa PP prirubnicom i grijačem (10-30W/230V).

**HL64B**

Krovni slivnik DN 75/110 horizontalni, brtvena prirubnica, element sa stezaljkama, prohodni 148x148mm/137x137mm

**HL65F**

Nastavni element 345mm / d 125mm sa PP prirubnicom

PODACI O PAKIRANJU**DOWNLOADS**

TLAK	HL64BF_pr	max.
Oglas (WEB)	HL64BF_B	640x480/300dpi
Foto Parts List	HL64BF_gr	150x150/72dpi
Tehnički crtež	HL64BF_7_1_a	pdf
Tehnički crtež	HL64BF_7_1_a	png
CAD	HL64BF_7_2_a	dxf