


HL64HPowerSafe


Sigurnosni krovni Power slivnik DN75 horizontalni sa bitumenskom prirubnicom i po visini podešavajućim uljevom



Sigurnosni krovni Power slivnik horizontalni DN75 sa bitumenskom prirubnicom i po visini podešavajućim uljevom 28-58mm.

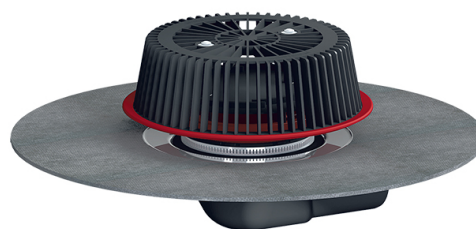

Tehnički crtež

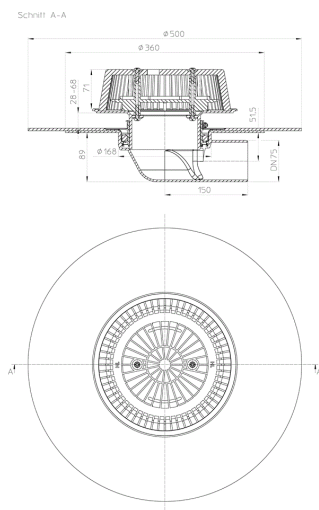

TEHNIČKI PODACI

materijal	PP	visina ugradnje	93 mm
dimenzija (mjera)	DN75	nastavak (umetak)	
učinak / kapacitet	see Download	rešetka dotoka	Laubfangkorb d 262 mm
težina	3,817	klasa opterećenja	

EAN

9003076040872

dotok

norme

GLAVNI PODACI

rezervni (nadoknadni) dijelovi

**HL062.1E PowerSafe**

Hvatač lišća za sigurnosne Power slivnike

**HL170**

Plitki hvatač lišća d 150mm

PODACI O PAKIRANJU

DOWNLOADS

TLAK	HL64HPowerS_pr	max.
Oglas (WEB)	HL64HPowerS_B	640x480/300dpi
Foto Parts List	HL64HPowerS_gr	150x150/72dpi
Tehnički crtež	HL64HPS_1_a	pdf
Tehnički crtež	HL64HPS_1_a	png
CAD	HL64HPS_2_a1	dxf
other	HL64_PowerSafe_Capacity.pdf	Capacity / Abflussleistung