

HL72N/7


Podrumski slivnik DN75 horizontalni 148x148mm/138x138mm



Podni slivnik od PP otporan na temperaturu do 95°C, DN75 horizontalni, sa protokom 1,47 l/s, pjeskolovom, mokrim zatvaračem zadaha sa visinom vodenog stupca 60 mm, otvorom za čišćenje, nastavim okvirom podesivim po visini 45 - 95 mm / 150 x 150 mm i uljevnom INOX rešetkom 137 x 137 mm nosivosti 300 kg. Građevinska zaštita sadržana u isporuci.



Tehnički crtež

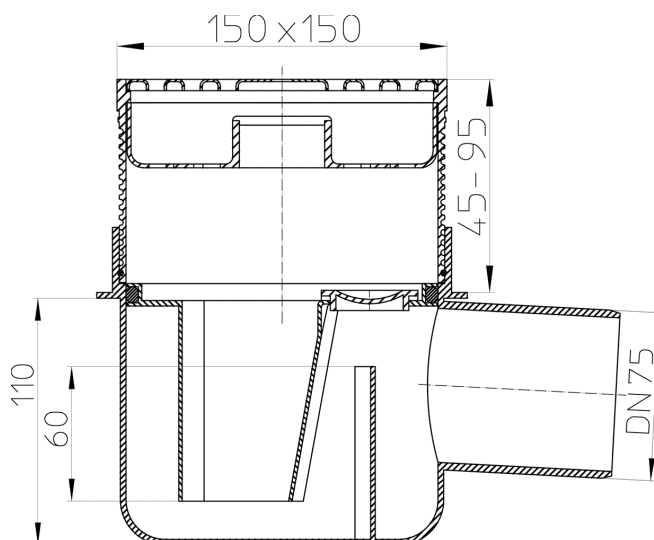

TEHNIČKI PODACI

materijal	PP	visina ugradnje	170 mm
dimenzija (mjera)	DN75	nastavak (umetak)	
učinak / kapacitet	1,50 l/sec	rešetka dotoka	Edelstahl 138 x 138 mm
težina	0,873	klasa opterećenja	K3 - 300 kg

GLAVNI PODACI

rezervni (nadoknadni) dijelovi

**HL0317.5E**

Pjeskolov

**HL66.9**

Nastavni element d 145mm sa žljebovima/148x148mm/138x138mm

**HL0317.1E**

Uljevna rešetka od INOXA 139x139mm

**HL062B.2E**

Nastavni element d 145mm/90mm/148x148mm

HL066.4E

Okrugla brtva 135x2,5mm

pribor

**HL350**

Nastavni element 130mm/d 145mm

**HL01058D**

Protupovratna brtva za priрубnicu od INOXA 220x155mm

**HL062B.3E**

Noseći prsten

**HL160**

Prsten za odvodnjavanje d 150mm

**HL350.1**

Nastavni element 180mm/d 145mm s brtvenom priрубnicom i izolacionom garniturom HL84

**HL350.1H**

Nastavni element 180mm/d 145mm s bitumenskom priрубnicom

**HL350.2**

Nastavni element 130mm/d 145mm sa doljevom DN40

PODACI O PAKIRANJU

DOWNLOADS

TLAK	HL72N_pr	max.
Oglas (WEB)	HL72N_B	640x480/300dpi
Foto Parts List	HL72N_gr	150x150/72dpi
Tehnički crtež	HL72N_7_a	pdf
Tehnički crtež	HL72N_7_a	png

