

HL3100T


Balkonski- i terasni slivnik DN75/110 vertikalni sa zatvaračem zadaha otpornim na smrzavanje, 145x145mm / 138x138mm



Slivnik za balkone i terase DN75/110 vertikalni, sa protokom 2,00 l/s, prirubnicom za prihvatanje odgovarajućeg pribora za spoj sa hidroizolacijom, suhim zatvaračem zadaha otpornim na smrzavanje, nastavim okvirom podešivim po visini 8 - 80 mm / 145 x 145 mm sa mogućnošću odvodnje procjedne vode sa hidroizolacije, uljevnom INOX rešetkom 138 x 138 mm nosivosti 300 kg, građevinska zaštita okvira i priрубnice sadržana u isporuci



Tehnički crtež

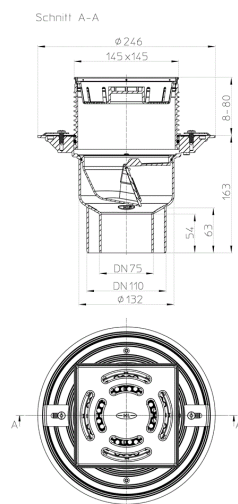

GLAVNI PODACI

rezervni (nadoknadni) dijelovi



HL05100.4E

Klapna u kompletu



HL05100T.OE

Pjeskolov (HL3100T/HL5100T)

**HL3100TK**

Kućište balkonskog- i terasnog slivnika DN75/110 vertikalni

**HL03100.OE**

Građevinska zaštita

**HL619**

Pričvrсни set "FixT"

**HL3910**

Uljevni nastavak d 146mm/ okvir INOX 145x145mm/ rešetka INOX 138x138mm, Klick-Klack sistem

**HL03910.1E**

Uljevna rešetka INOX 138x138mm

**HL03910.2E**

Nastavni element d 146mm/okvir INOX 145x145mm uklj.brtvu O-ring, sistem KLICK-KLACK

pribor**HL150**

Procjedni prsten za balkonske i terasne slivnike serije HL3100T i HL5100T

**HL151**

Plitki hvatač lišća za balkonske i terasne slivnike serije HL3100T i HL5100T

**HL153**

Termoizolacija za kućište slivnika serije HL3100T

**HL154**

Grijač 40W/m/230V za balkonske i terasne slivnike serije HL3100T i HL5100T

**HL156**

Toplinska izolacija za vertikalni slivnik tipa HL3100T sa integriranim grijačem

**HL3911**

Završni nastavak d 146mm, INOX okvir (V4A) 145x145mm, INOX rešetka 138x138mm pričvršćena vijcima

**HL05100.7E**

Umetak zatvarača zadaha komplet

**HL2100**

Umetak zatvarača zadaha "Primus" za HL3100 i HL5100

**HL3400**

Nadogradni element d 146mm/200mm s brtvom O-ring

**HL8500**

Nadogradni element 200mm/d 146mm s prirubnicom i brtvom O-ring

**HL8500H**

Nastavni element sa bitumenskom prirubnicom i protupovratnom O-Ring-brtvom za HL3100T i HL5100T